ATN

FASSI GROUP

ZEBRA 16 STAB

Articulated Boom Lift With Stabilisers

Built to last

MAIN FEATURES

Working height	16,80 m / 55,11 ft
Maximum horizontal outreach	9,40 m / 30,84 ft
Longitudinal leveling	8° / 14%
Transverse leveling	11° / 19%
Automatic stabiliser leveling	

▲ STANDARD EQUIPMENT

- 4 wheel drive
- Oscillating axle
- Non-continuous 360 ° turret rotation
- 180 ° platform rotation
- Jib tilt angle 133°
- 230kg load capacity
- 45% gradeability
- 5° Tilt
- 1° tilt on stabilisers
- Drive at full height
- Overload sensor
- Hour meter
- Alarm
- On-board diagnostic colour LCD console
- Driver protection system
- Swing out engine tray
- Wide opening covers

★ ACCESSORIES & OPTIONS

- Anti-crushing system (ACS)
- Catalyzed particle filter (CPF)
- Generator
- Power supply in the platform
- Compressed air plug in platform
- Flashing beacon
- Extreme cold kit
- Motion alarm
- Movement cut off at 5° tilt
- Platform working lights
- Oil (HV 32 /bio/ food-grade)
- Non-marking tyres
- Stabilising plate holder
- Customer colours paint

ZEBRA 16 STAB

	Working height	16,80 m / 55,11 ft
	Floor height	14,80 m / 48,55 ft
	Maximum horizontal outreach	9,40 m / 30,84 ft
	Knuckle height	7,80 m / 25,59 ft
	Load capacity	230 kg / 507 lbs

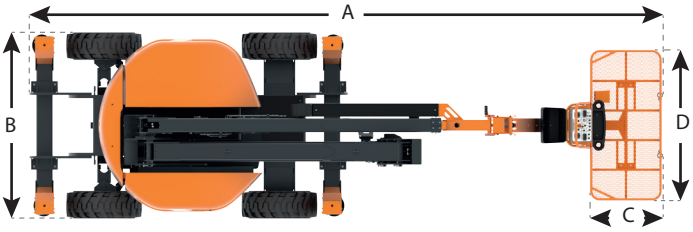

A	Length	7,70 m / 25,26 ft
B	Width	2,19 m / 7,18 ft
C	Platform length	0,86 m / 2,82 ft
D	Platform width	1,80 m / 5,90 ft
E	Height	2,25 m / 7,38 ft
F	Length (transport position)	5,69 m / 18,66 ft
G	Wheelbase	2,10 m / 6,88 ft
H	Ground clearance (machine centre)	0,40 m / 1,31 ft

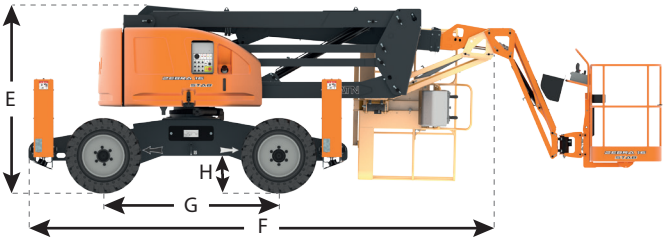

	Turret rotation	360° NC
	Platform rotation	180°
	Tail swing	0
	Jib tilt angle	133°
	Drive speed (stowed)	6 km/h / 3,72 mph
	Drive speed (raised)	0,9 km/h / 0,56 mph
	Gradeability (stowed)	45%
	Max. tilt	5°
	max. slope possible on stabilisers	1°
	Inside turning radius	1,72 m / 5,64 ft
	Outside turning radius	4,55 m / 14,92 ft
	Total weight	8050kg/ 17747lbs
	Ground pressure on stabilisers	670 kN/m²
	Ground pressure on wheels	1422 kN/m²

	Wheel size	33x12-20
	Diesel engine	26,1 KW
	Fuel tank capacity	60 L
	Hydraulic tank capacity	85 L

CE

This product complies with European regulations in force (EN 280).
Due to our constant improvement policy, ATN reserves the right to many any modifications without any prior notice.

Ri : Inside turning radius
Re : Outside turning radius

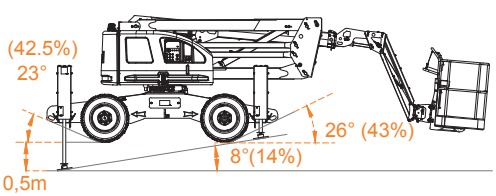

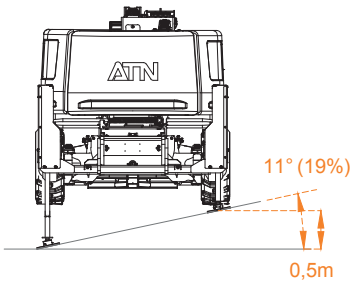

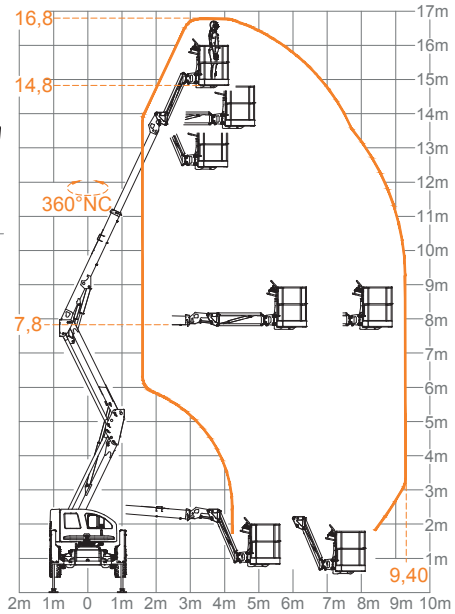

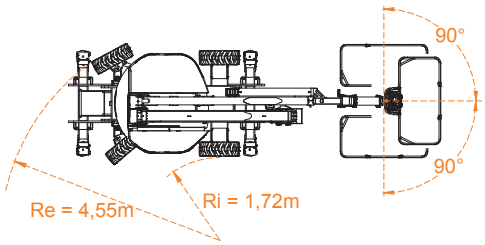

Lieu-dit Bacqué - Rue André Thévet - 47400 FAUILLET - FRANCE
Tél. : + 33 (0)553 798 320 - contact@atnplatforms.com - www.atnplatforms.com